


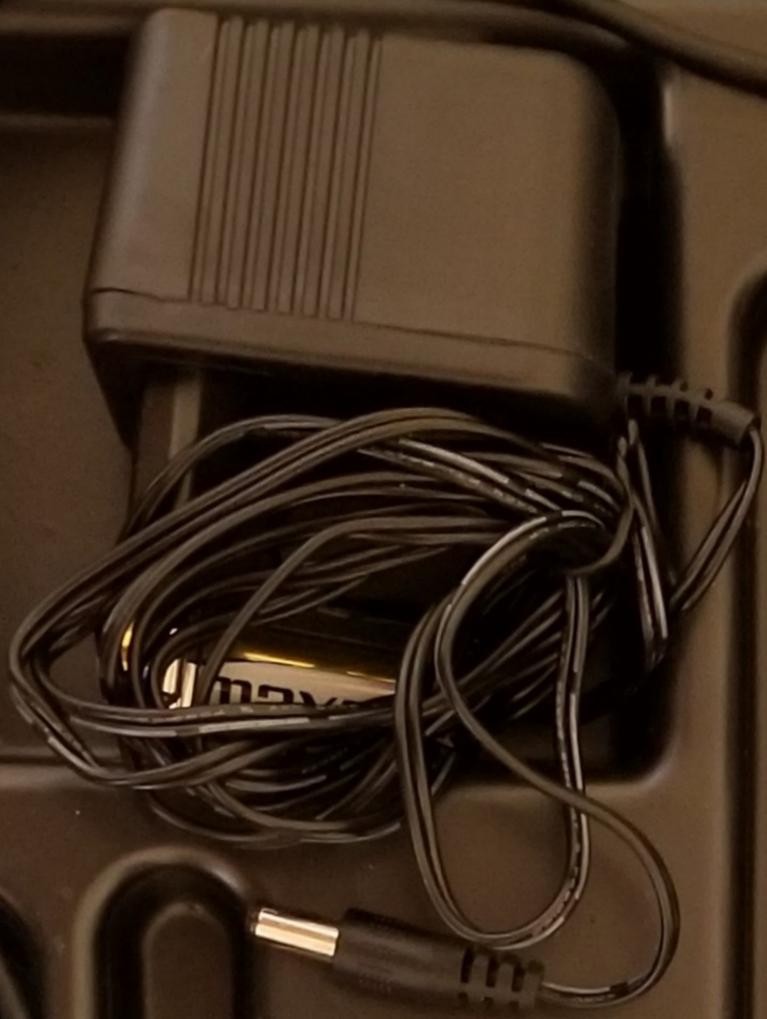
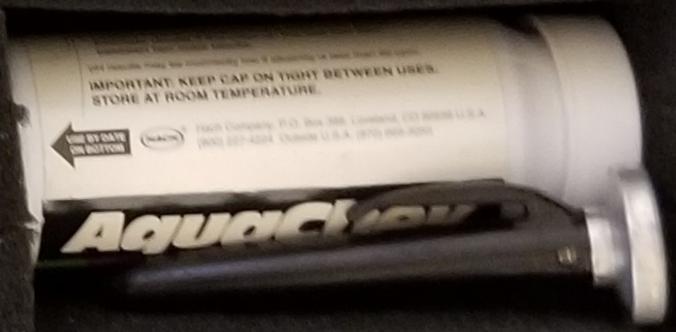



Turbidimetre

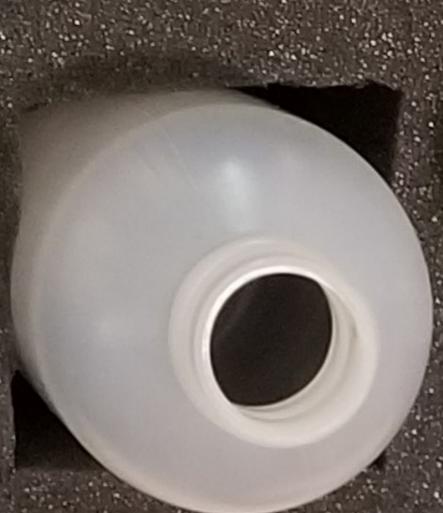

Chlore

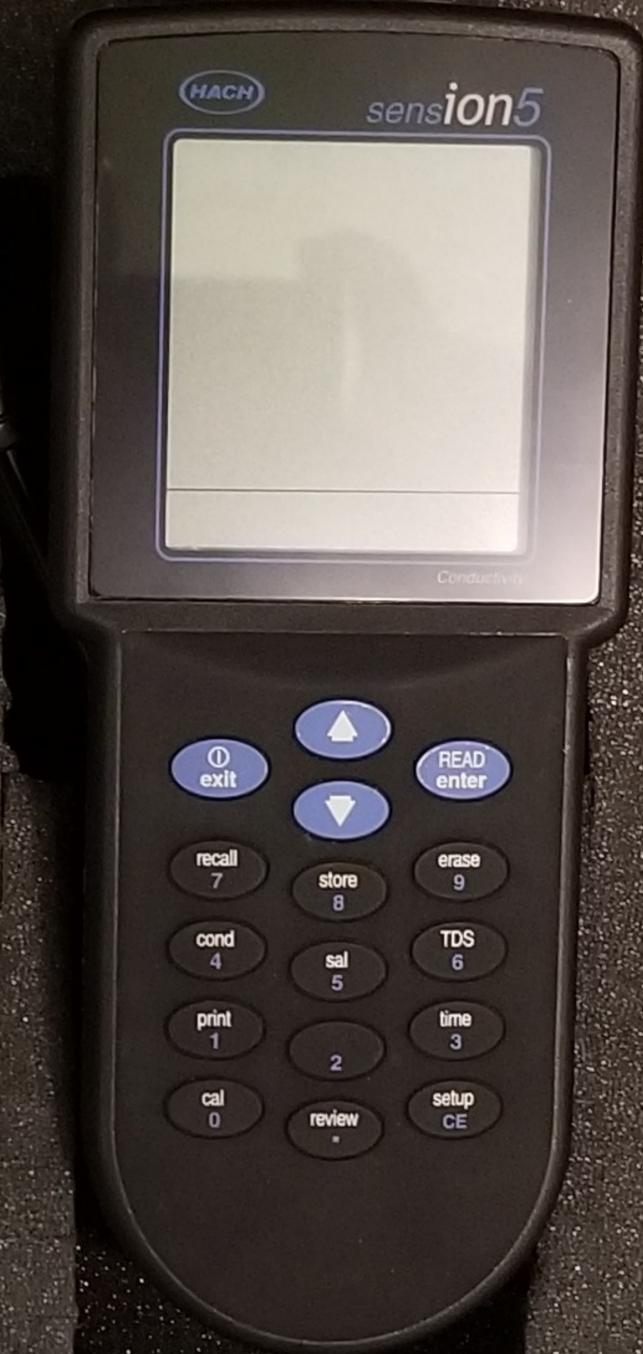

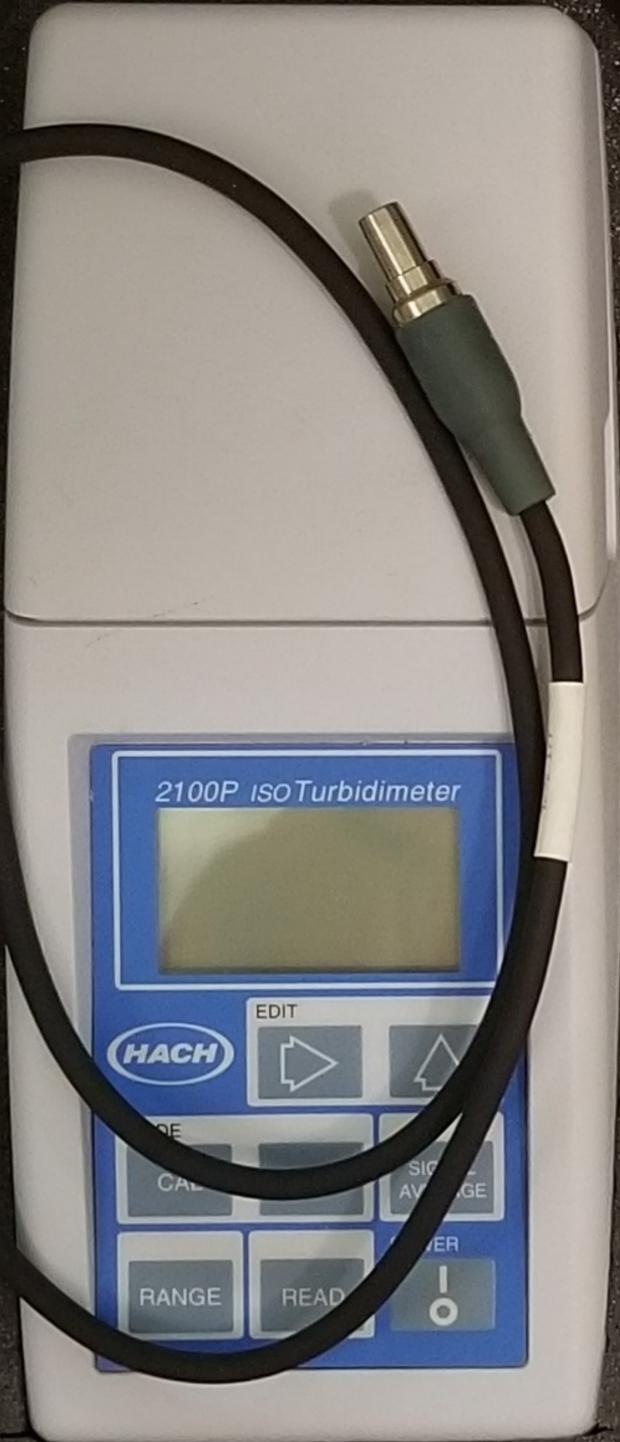

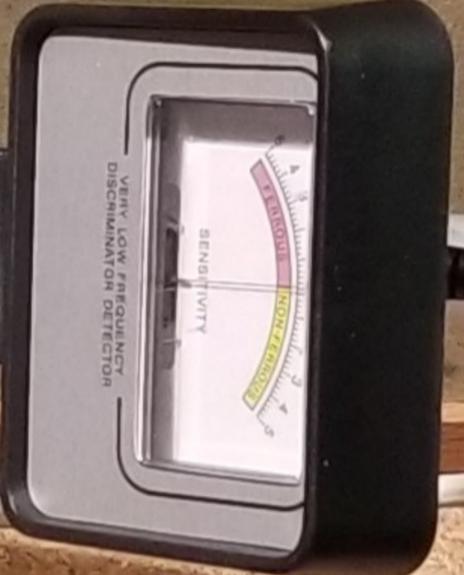

CONTROL PANEL

- GROUND: OFF, NORMAL
- DISCRIMINATION: MIN, MAX
- SENSITIVITY: MIN, MAX
- TUNING: MIN, MAX
- MODE: OFF, VF, TR1, TR2
- LOW BATT: (Red LED indicator)
- VOLUME: (Knob)

A black plastic control panel with a red button in the center. It features several knobs and a red LED indicator. The knobs are labeled: GROUND (OFF, NORMAL), DISCRIMINATION (MIN, MAX), SENSITIVITY (MIN, MAX), TUNING (MIN, MAX), and MODE (OFF, VF, TR1, TR2). A red LED indicator is labeled "LOW BATT". A "VOLUME" knob is also present.



442051



442052

Ensuite revenir à



443969

Ensuite au-dessus
N° du logger et



442048

er tous les loggers, ensuite Clic sur la gauche
GRAMMES et clic en bas sur Résultats

*Si vous voulez laisser les loggers plusieurs jours et passez en voiture ALLEZ SUR PROJET ET
SELECTIONNER, (DRIVE BY) AVANT D'INITIALISER.

Poser l'antenne sur le toit allumé le Commlink, et la tablette. Cliquez Haut à Gauche sur
é jusqu'à ce que la tablette vous dise l'antenne est allumée et ensuite
GRAMMES



442049



442050





MESCAN 820
Communication Link

GU

